AZATOM®

Studio **Home** UHD2

2.1 Ch Soundbar With Built-in Sub-woofer

Optical Audio | HDMI ARC | AUX-IN | Bluetooth | Equaliser | Remote Control

Best of British GB Audio & Electronics

User Manual

This manual is available to download online at www.azatom.com

What's in the box:

1. Studio Home UHD2 Soundbar
2. Remote Control
3. Mains Adapter
4. Optical Cable
5. User Manual
6. Wall-Mount Brackets
7. Wall Plugs and Screws



Studio Soundbar



Remote Control



Mains Adapter



Optical Cable



User Manual



Wall-Mounts



Wall Plugs & Screws

Controls & Interface:

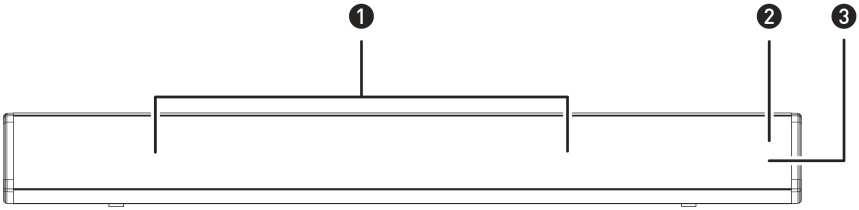



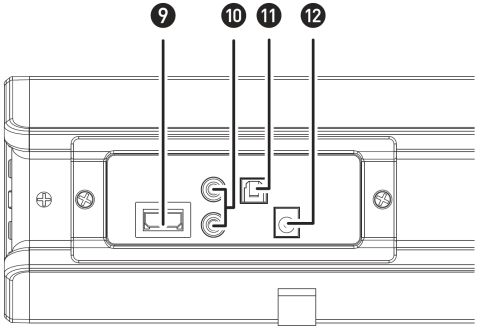

1. Speaker Drivers
2. LED Indicator Light
3. Remote Control Sensor
4. Power Button
5. Select Input:
   - BT, Optical, Aux-IN, Line-IN, HDMI ARC
6. Volume + and -
   - Press to adjust volume up or down
7. Bluetooth Pair Button
8. 3.5mm Line-IN Socket
9. HDMI ARC Socket
10. Aux (RCA L/R) Socket
11. Optical-IN Socket
12. DC (20V 1.2A) Socket

Indicator Lights:

State	LED Colour
Power off	RED
Optical Mode	YELLOW
HDMI ARC Mode	PINK
Line-IN Mode	GREEN
Aux-IN Mode	WHITE
Bluetooth Ready	FLASHING BLUE
Bluetooth Connected	SOLID BLUE

Remote Control:

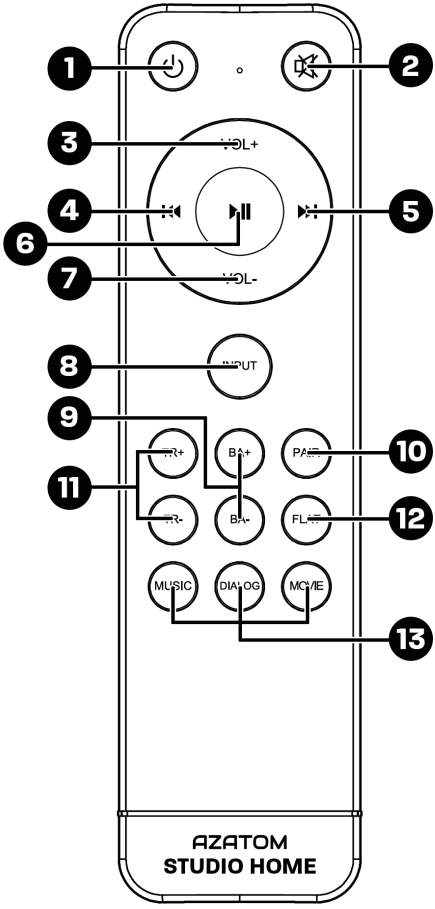

Remote Control Buttons:

1. Power Button
2. Mute Button
3. Volume +
4. Rewind / Skip Backwards Button (Bluetooth Mode)
5. Fast-Forward / Skip Forward Button (Bluetooth Mode)
6. Play / Pause Button
7. Volume -
8. Input (Audio INPUT)
9. Bass + / Bass -
10. Bluetooth Pair Button (/ Disconnect Device)
11. Treble + / Treble -
12. Flat Equaliser (Default Sound Mode)
13. Equaliser Modes - Choose a sound mode
    (Music/Dialog (Voice)/Movie)

Wall Mounting:

It is the installer responsibility to verify that the wall safely supports the total weight of the Soundbar.

- Additional tool (not included) are required for the installation.

1. Remove the four screws on the rear panel of the Soundbar. Store the removed screws in a safe place. Attach the wall brackets (included) to the bar using the previously removed screws to firmly attach the brackets.

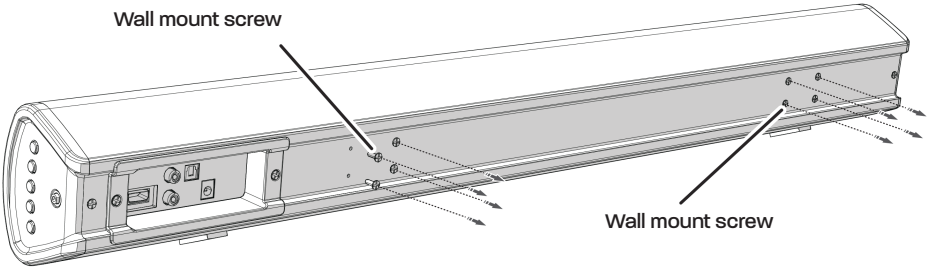

2. Drill 2 parallel holes (3-8mm Diameter each according to wall type) in the wall. The distance between the holes should be 789mm.

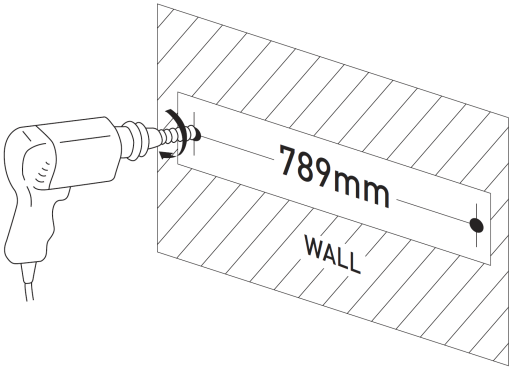

3. Firmly fix a wall plug (included) into each hole of the wall if necessary

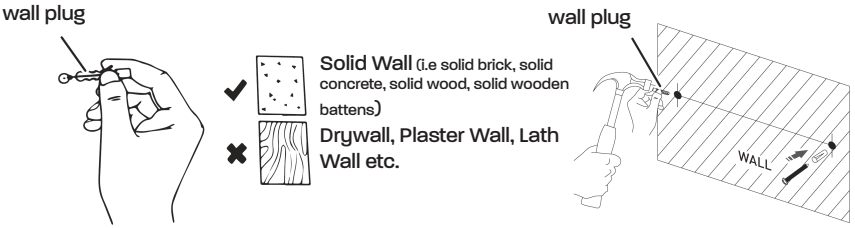

4. Insert a screw (included) into each wall plug. Make sure to leave a 5mm gap between the wall and the head of the screw. Lift the bar over the heads of the screws and slot into place.

Connections:

Using the AUX (RCA) Connection:

Use the RCA stereo audio cable to connect the TV's stereo RCA (L/R) Audio output socket to the AUX RCA (L/R) sockets of the Soundbar.

Then press the INPUT button on the remote control or press the SOURCE button on the unit to select the AUX Mode function.

Turn on your TV to use the Studio Home UHD2

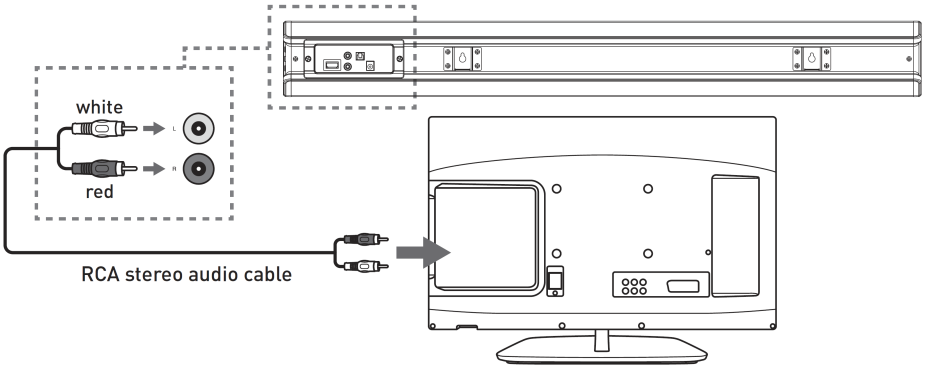

Using the Line-IN Connection:

Plug one end of a 3.5mm audio cable (included) into the Line-IN socket of the Soundbar.

Plug the other end of the cable into the audio output/headphone socket of an audio player device.

Press the POWER button on the Soundbar or Remote Control to turn on the unit.

Press the SOURCE button to select the Line-IN Source input on the Soundbar - Or press the INPUT button on the Remote Control. The LED Indicator will turn Green.

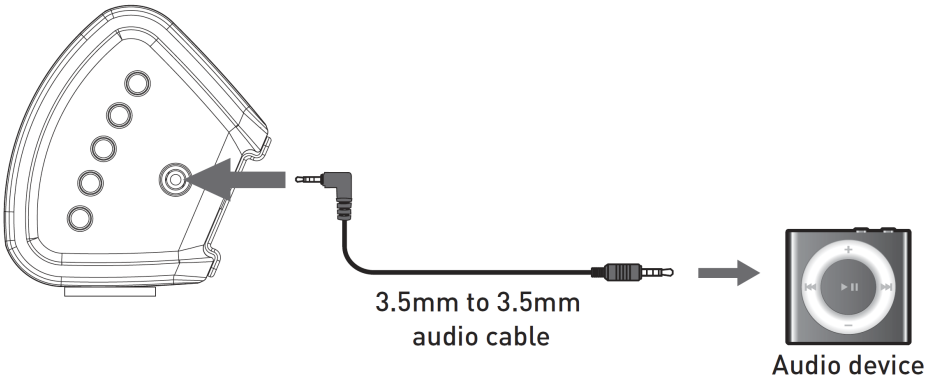

Using the Optical Connection:

You will need: An audio source device with an optical audio output and a digital optical audio cable.

Connect the digital Optical Audio cable to the optical output on the audio source and to the optical input on the Soundbar.

Press the Power button to turn on the Soundbar and and select

the Optical input mode as the source. The LED Indicator will turn Yellow.

Using the controls on your connected audio device, make sure the audio settings are set to PCM or Optical Audio and are turned on.

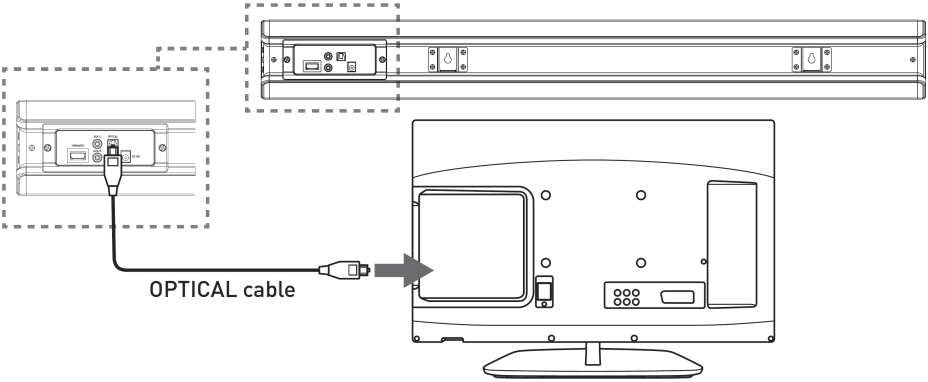

Using the HDMI ARC Connection:

Connect the HDMI cable (not included) to the HDMI ARC socket on the rear of the Soundbar and the other end to a TV that supports HDMI ARC.

Note: In the HDMI Mode, if your speakers have no audio, and the indicator LED is flashing quickly - Use your source device (Tv, DVD Player etc.) to set the audio output mode to PCM, or turn off the sound source output.

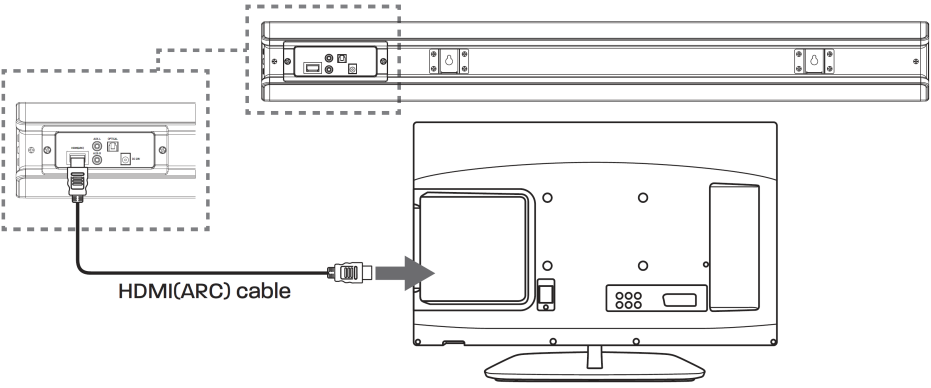

Connecting to the Mains Power Adapter:

Ensure that the power supply voltage is in the voltage of 100V~240V. This unit is designed to use the supplied adapter only. Connecting the Soundbar to any power source other than the supplied source may cause damage to the Soundbar.

Connect the power adapter to the Soundbar and an AC Mains socket.

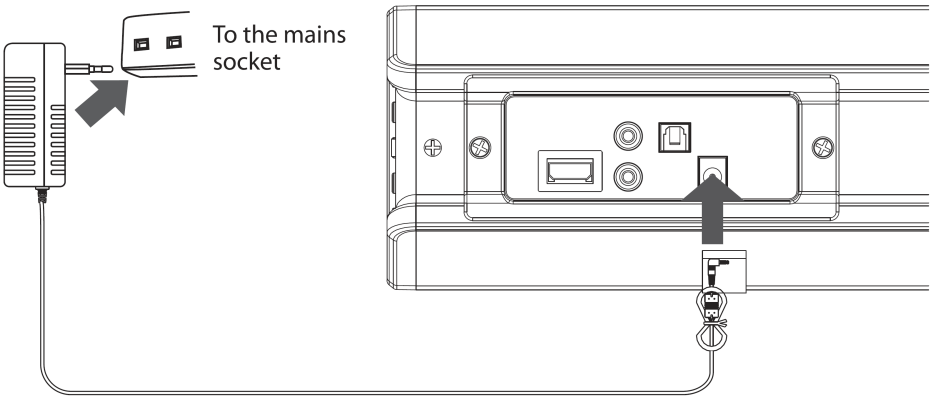

ENSURE ALL AUDIO CONNECTIONS OF THE UNIT ARE CONNECTED BEFORE CONNECTING THE MAIN POWER SOCKET. Unplug the power cord from the outlet when the unit is not being used for an extended period of time.

Bluetooth Operation:

Pairing a Bluetooth device for the first time:

Press the POWER button on the unit for the POWER button on the remote control to turn on the Soundbar.

Press the INPUT button on the remote control or press the SOURCE button on the Soundbar until the Bluetooth Mode is selected - The Indicator LED will flash Blue.

On your device you wish to connect to the Soundbar, select "Studio UHD2" from the available devices in the Bluetooth settings of your device.

If your device requests a Bluetooth pass code, use "0000"

Once successfully connected and paired, the LED indicator on the Soundbar will turn a Solid Blue. After the initial pairing, the unit will stay paired unless manually unpaired by you, or until it is erased due to a reset of the device.

If you need to manually un-pair a device from the Soundbar, press and hold the PAIR button for 3 seconds to remove the device from the Soundbar and allow it to pair to a new device.

If your device should become unpaired or you find it is unable to connect, repeat the above steps.

Playing Audio Wirelessly:

Follow the instructions for pairing a device with the Soundbar. Use the controls on the connected device to select and play a track. To play, pause or skip a track, use the controls on the connected audio playing device.

Specifications:

Amplifier:

Power Output: Max power output 180W
Frequency Response: 20Hz - 20KHz ± 3dB
Input Sensitivity: 700mV

Main Unit:

Power Supply:
Input: 100 - 240V ~ 50-60Hz
Output: 20V 1.2A

Standby Power Consumption: ≤ 0.5W

Full Range Speaker Drivers:
Impedance: 4ohm (3 inches)
Frequency Response: 180Hz ~ 20KHz

Dimensions: 822 x 88.5 96mm
Mains Cable Length: 1.5 Metre

For Technical support please see the product page for the Studio Home UHD2 on www.azatom.com or email us directly at: customersupport@azatom.com

@AZATOM

REGISTER YOUR PRODUCT ONLINE. TO LEARN MORE & REGISTER FOR OUR AZATOM WARRANTY* PLEASE VISIT: WWW.AZATOM.COM/WARRANTY

AZATOM© 2021 ALL RIGHTS RESERVED. AZATOM® IS PART OF AZATOM GROUP LIMITED.
SEE SITE FOR SAFETY INFORMATION. AZATOM® RESERVE THE RIGHT TO WITHDRAW ANY AND ALL PROMOTIONS WITHOUT NOTICE. FOR FULL WARRANTY, EXTENDED WARRANTY AND PROMOTIONAL OFFER TERMS & CONDITIONS PLEASE VISIT WWW.AZATOM.COM/TERMS-CONDITIONS

*REGISTRATION REQUIRED